



Модел: PT-AT-FT

# Fingerprint system 2-B-1 Access control & Time and attendance

One finger solves it all

PT-AT-FT series is a fingerprint reader that combines door access control system and time clocking system, designed to safeguard your company as well as to improve your employee's discipline and productivity.

PT-AT-FT series delivers peace of mind through personalized identification via fingerprint technology. With PT-AT-FT series, there is no more worries about unauthorized entries and 'buddy punching' occurrences happening in your company.

PT-AT-FT series is made user-friendly, reliable and flexible, capable of integration with other existing security systems to ensure high-level of protection your company needs. Its innovative design complete with built-in doorbell and voice greetings, complements the advanced state of security system for your premises.

PT-AT-FT series is definitely the perfect choice for today's business operations!



## FEATURES & BENEFITS

- Manage one-to-many (1:N) identifications of 1000 templates (PT-AT-FT1), 1500 templates (PT-AT-FT 2) and 2800 templates (PT-AT-FT 3)
- Allow a maximum of 10 fingerprints enrollment per user
- Allow rotation fingerprint placement
- Possess storage capacity of 30,000 (PT-AT-FT-1), 100,000 (PT-AT-FT-2) up to 120,000 (PT-AT-FT-3) transactions
- Offer easy enrollment and fast clocking system
- Equipped with built-in doorbell, voice greeting and door access system to ease operation
- Enable transactions download via RS232, RS485 or TCP/IP
- Complete with straight forward Windows based management software and built-in standard time and attendance features
- Improve management of human resources

# Fingerprint system 2-B-1 Access control & Time and attendance



## LAYOUT PLAN 1

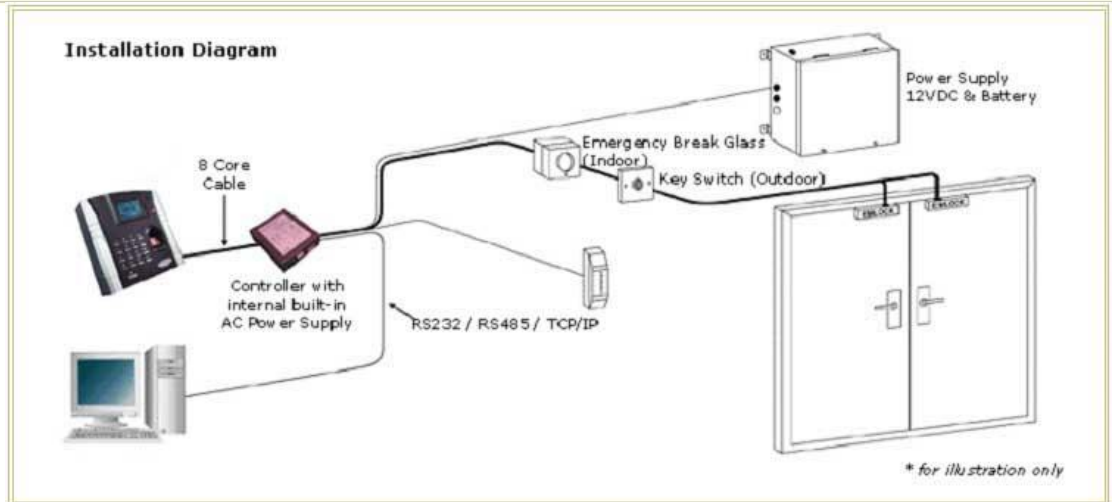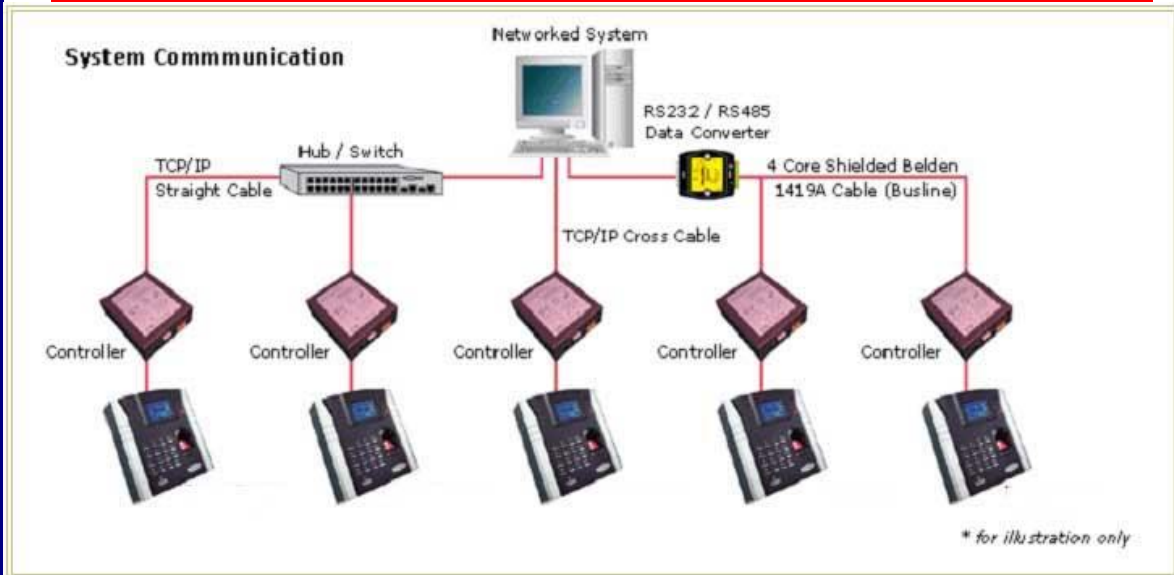

## SPECIFICATION 1

Size (mm)	150(W) x 145(H) x 38.5(D)
Identification Time (s)	1.5 sec for 1000 Templates
Enrollment	Up to 10 fingerprints per user
Fingerprint Placement	Allow rotation of finger placement
FAR	<0.0001%
FRR	<1%
Transaction storage	30,000 (PT-AT-FT1), 100,000 (PT-AT-FT 2), 120,000 (PT-AT-FT3)
User capacity	1,000 templates (PT-AT-FT 1) / 1,500 templates (PT-AT-FT 2) / 2,800 templates (PT-AT-FT 3)
Time Zone	50 Time Zones Settings
Communications	RS232, RS485, TCP/IP; Weigand (for PT-AT-FT1 WG model only)
Baud Rate (bps)	9600, 38400, 115200
Operating Temperature (°C)	0 - 45
Operating Humidity (%)	20 - 80
Power	12VDC@3A, regulated
Language	English, Chinese Simplified and Chinese Traditional, Indonesia and Thai



Модел: PT-AT-FT1 / PT-AT-FT 2 / PT-AT-FT 3

### JULIUS LTD.

2 Otec Paisii Sq., fl.2 /building of BRP/  
Ruse-7000  
Bulgaria,  
Tel: +359 809015, fax: +359 809019  
e-mail: [info@powertouching.com](mailto:info@powertouching.com)